YOUR LOCAL TERMITE CONTROL EXPERT

We assure you this job has only successful when this could be done with the trained technicians & proper equipment with the right dose of approved termiticides

SATISFACTION PESTOP SERVICES GUARANTEED

TERMITES HAVE AN APPETITE - THE SIZE OF YOUR HOUSE / PROPERTY

PREVENTIVE MEASURES ARE BEST OPTION FOR TREAT

mail us :

pestop.services@gmail.com

contact@pestopservices.com

visit on:

www.pestopservices.com



SAY GOOD BY TO YOUR UNWELCOME PESTS !

MEMBER

PEST MANAGER'S ASSOCIATION VADODARA
PMAV
Reg. No. G/3506 - F/3190

Regi. Off. 09, Shilpi Society, Bh. Arunachal society, Subhanpura, Vadodara-23

TERMITE MANAGEMENT

WARRANTED JOB BY

pestop® services

CONTACT:

9879 243434

9099 243434




“

A SMALL BUG CAN BE A BIG TROUBLE

”

pest op® services



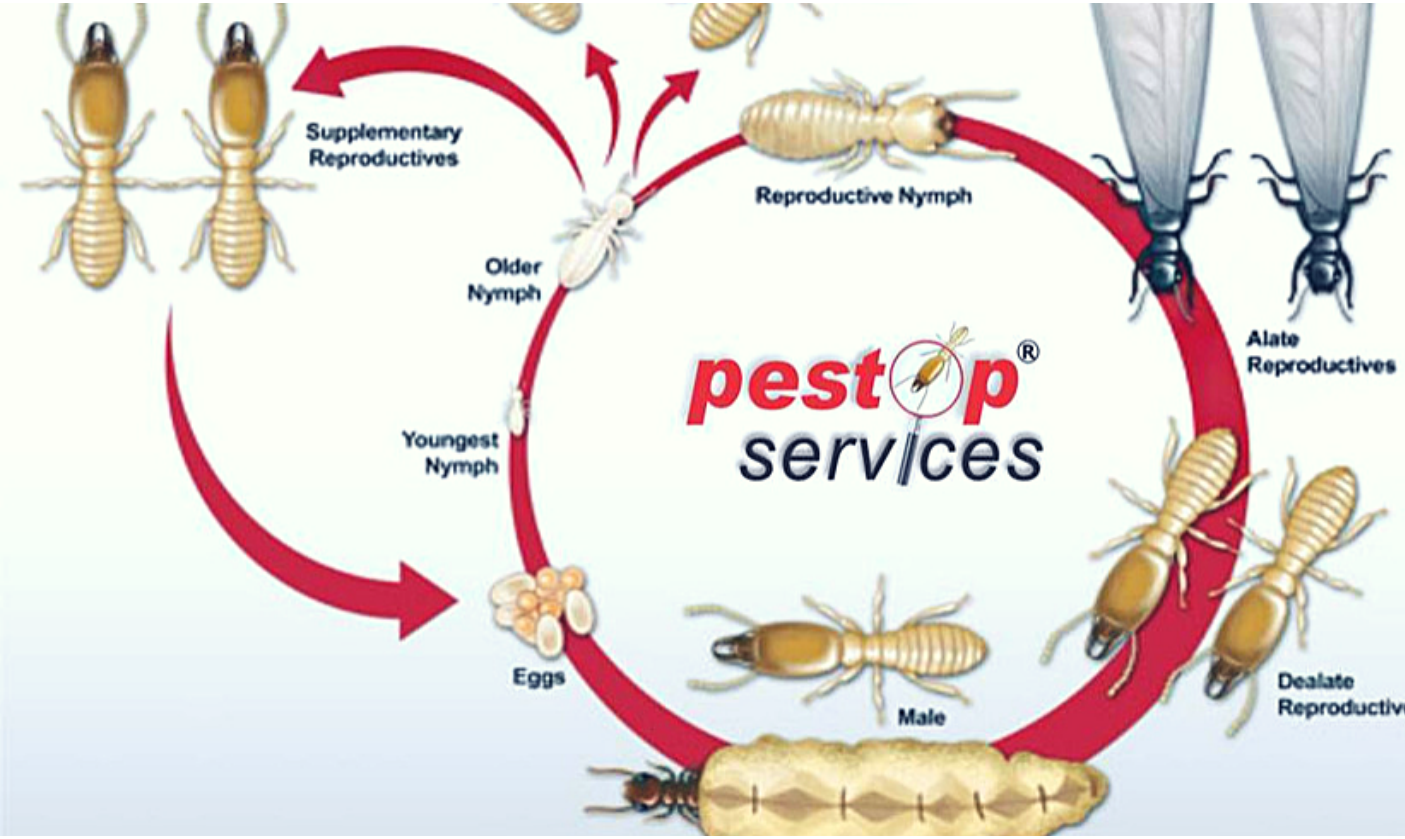

HOW TO IDENTIFY

Termites construct shelter tubes, also known as earthen tubes or mud tubes,

STRUCTURAL ENTRY

This tiny insects can enter 1/32 inches openings that might be easily available to the ready made cutting channel from plumber & electrician for concealed wiring.

LIFE CYCLE

Termite queens have the longest lifespan of any insect in the world, with some queens reportedly living up to 30 to 50 years.The queen only lays 10–20 eggs in the very early stages of the colony, but lays as many as 1,000 a day when the colony is several years old. But In some species, the mature queen has a greatly distended abdomen and may produce 40,000 eggs a day.

“

PRE CONSTRUCTION ANTI TERMITE TREATMENT AS PER IS:6313-PART-II

”

pestop® services





BACKFILL STAGE

Treatment to each side of all built-up walls which will be immediate contact with the foundation & apply liquid @ 7.5 lit/ Sq.Mt

TOP SURFACE OF PLINTH FILLING

before laying the slab or floor treat the top surface of the consolidated earth within the plinth walls with 1 % conc. Chem. emulsion at the rate of 5.0 lits. per sq.mt. of the horizontal section of entire floors.

JUNCTION OF WALL & FLOOR & EXTERNAL PERIPHERY

Treatment to the Of the vertical section of the built-up walls from plinth level to G.F. level. External wall treatment to at the rate of 2.25 lits per R.mt. of the vertical of the finished building to a depth of 500 mm from the actual level.

“

POST CONSTRUCTION ANTI TERMITE TREATMENT AS PER IS:6313-PART-III

”

pestop® services





INSIDE /OUTSIDE FLOOR TREATMENT

Drill the holes at outside periphery area of the main building & the compound wall with the 8 mm dia drill bit at a distance of 30 cms apart c/c up to depth of min 7 inch deep

DOOR & WINDOW TREATMENT

Drill the holes with the 5mm dia holes at the junction of the wood & brick wall up to 2 inch deep at outside periphery area of the main building

APPLICATION OF TERMITICIDE & SEALING HOLES

By using the right equipment with proper pressure we are using the Gator pump & apply the odorless liquid termiticide emulsion into the holes made by us with proper doses (i.e. min. 1 lit per hole average). Sealing these holes with matching color cement mortar.

“

YOUR SEARCH WILL ENDS HERE TO STOP TERMITES & OTHER INSECTS / PESTS

”

pestop® services





BRANCH OFF. & MARKETING OFFICE

GF-07, PRATIBHA COMPLEX, ARUNACHAL
SAMTA ROAD, SUBHANPURA, VADODARA

LL: +91 265 238 6562
Customer Care : +91 9426 007492

Managing Partners:
Mr. Nilesh Kachhia, B.Sc. (Agriculture)
Mr. Jitendra Bhatt (Diploma Electrical)